

# artnovion

# Ulysses Sub Trap - Corner


Tuneable Pistonic Diaphragmatic Absorber

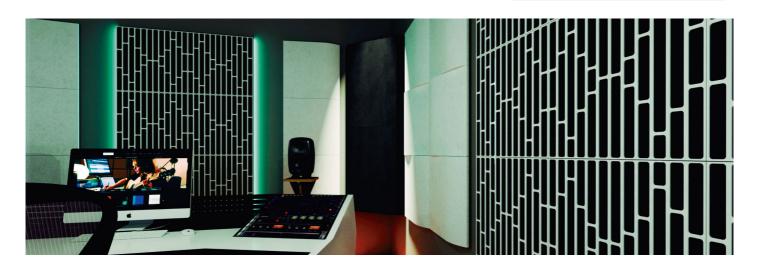



## Performance

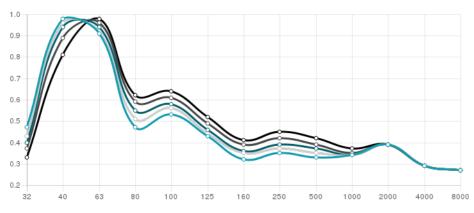

# Technical Information









### Features

Type:

T uneable Pistonic Diaphragmatic Membrane T echnology

Tuneable absorption range: 40 to 60 Hz

- Hz-by-Hz peak absorption tuning
- Triple Pressure acoustic core + Velocity core
- High Efficiency Bass Trap

Material:

- Acoustic fabric
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

This panels can only be installed on v ertical wall corners.

### Dimensions:

FG - SF | 736x892x384mm



# artnovion

# Ulysses Sub Trap - Corner

# Tuneable Pistonic Diaphragmatic Absorber

Low frequency control is the foundation of acoustic treatment.

Strong modal frequencies can be the make-or-break of many rooms, often uncontrollable without altering room structure.

Enter the Sub Trap - a new approach on low frequency control - a fine-tuneable device with unprecedented performance.

The Sub Trap is a new category of acosutic treatment, targetting the sub-bass frequency range. It boasts the highest absorption coefficient pervolume on the market.

It employs Artnov ion's latest membrane technology - a symbiosis of precision engineering and material science - creating a device that can be precisely calibrate to work at the exact resonant frequency of a space.

The Sub Trap is composed of 4 independent cavities - 3 sealed volumed equipped with independent, tuneable diaphragmatic membranes, and an additional acoustic core packed with a high performance porous absorber. This configuration is designed to bring you the best performance possible, with pressure and velocity sensitive cores exposed to the correct modal areas.

## Product finishes

#### (FG - SF) Suede Fabric Finishes









(TM208) Fuscia (TM209) Pistacchio (TM210) Turchese



## Features

#### Type:

T uneable Pistonic Diaphragmatic Membrane T echnology

Tuneable absorption range: 40 to 60 Hz

- Hz-by-Hz peak absorption tuning
- Triple Pressure acoustic core + Velocity core
- High Efficiency Bass Trap

#### Material:

(TM207) Bordo

- Acoustic fabric

- Marine grade plywood structural frame
- Calibrated cell acoustic foam

This panels can only be installed on v ertical wall corners.

#### Dimensions:

FG - SF | 736x892x384mm