





Performance

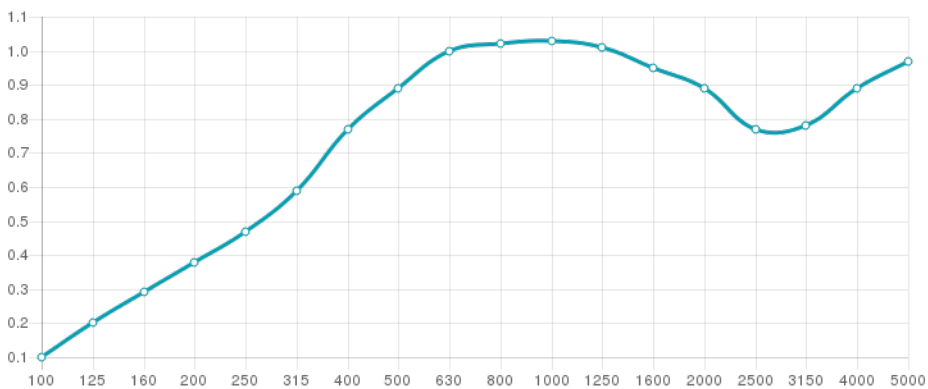

Features

Type:
Acoustic Absorber
Absorption range: 315 Hz to 3150 Hz

Acoustic Class: C | (α_w) = 0,75

Available fire rates:
FG | Furniture Grade


Materials:
- Natural wood | Lacquered HMDF
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

Four M6 Screw Thread receiver included on each panel.

Dimensions:

FG - NW | 595x595x58mm
FG - LW | 595x595x58mm


Technical Information

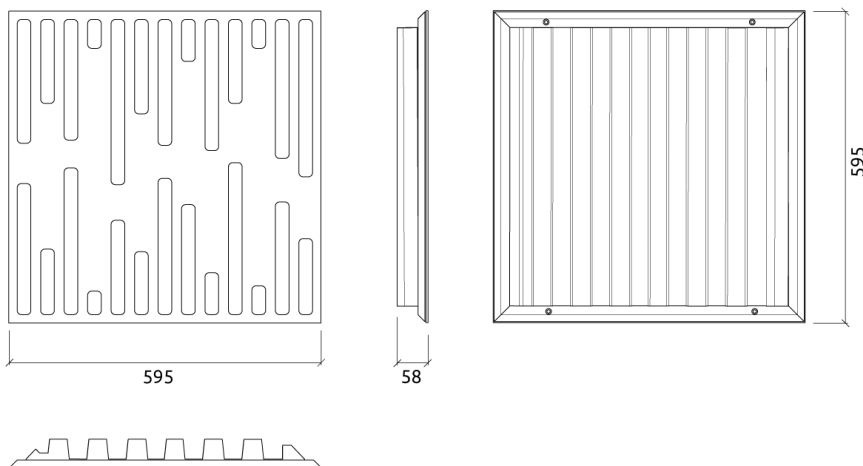

The latest addition to the Pro Audio and studio range, Orion is the culmination of extensive research into the optimisation of MLS sequences for calibrated acoustic absorption. Orion brings the distinct design of our flagship Logan diffuser to new horizons.

An array of Orion absorbers create areas with a distinct acoustic response, each calibrated to work at a certain frequency range. Using these Helmholtz-style absorption techniques boosts mid-low and mid range absorption, whilst the open areas of the panel are enough to guarantee high-frequency absorption. Orion is a great technical product, designed for the studio world, where each surface is critical - making sure that you get the best out of your studio. Orion's performance begins at 315 Hz and offers effective and even absorption up to 3150 Hz.

Orion is an impressive combination of unique Artnovion acoustic design with high performance acoustical cores. Orion absorber panels can be effortlessly installed on walls or ceilings.



Product finishes

(FG - NW) Natural Wood Finishes



(W02) Marron



(W01) Cerise



(W03) Wenge

(FG - LW) Lacquered Wood Finishes



(L01) Blanc



(L02) Noir



(L03) Rouge



(L05) Silver



(L06) Noir Vintage



(L07) Graphite Black



(L08) Rose Gold



(L09) Classic Gold



(L10) Bronze



(L11) Raw White



(L12) Raw Black

Features

Type:
Acoustic Absorber
Absorption range: 315 Hz to 3150 Hz

Acoustic Class: C | (α_w) = 0,75

Available fire rates:
FG | Furniture Grade

Materials:
- Natural wood | Lacquered HMDF
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

Four M6 Screw Thread receiver included on each panel.

Dimensions:

FG - NW | 595x595x58mm

FG - LW | 595x595x58mm

Fixing Systems

Walls & Ceilings



Ceiling



Add-ons



Mobile

